



Verankerungsbriden

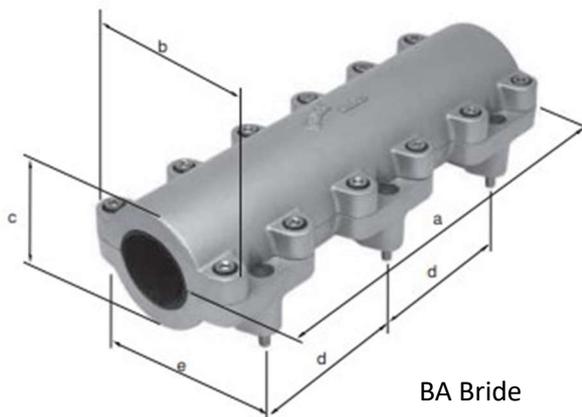

BA Bride

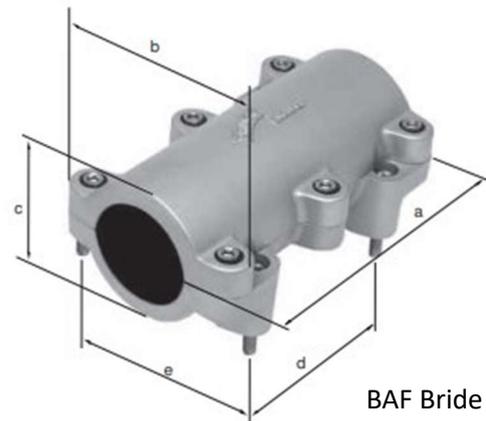

BAF Bride

Typ	Länge (a) mm	Breite (b) mm	Höhe (c) mm	Schrauben L (d) mm	Schrauben B (e) mm	BEY / BE3 Einlage Anzahl / Stk	Zugkraft BE3/BEY kN	Zugkraft Gummi (T) kN
BA 40	300	106	64	180	70		3.0	6.0
BA 80	400	146	104	240	110	6	4.0	8.0
BA 110	500	186	140	185	150	8	5.0	10.0
BA 130	500	220	170	185	185		5.0	10.0
BAF 40	180	106	64	90	70		2.0	3.5
BAF 80	250	146	104	140	110	4	2.5	5.0
BAF 110	300	186	140	185	150	5	3.0	6.5
BAF 130	316	220	170	184	180		3.5	6.5

Die Bridenhälften mit 30 Nm pro Schraube zusammenziehen.

Anzugsreihenfolge gem. Abbildung übers Kreuz und 2 mal nachziehen.

